

Woven Emblems

A flexible, light weight
alternative to embroidery.



Woven Emblems are manufactured using high-speed automatic weaving looms. With design patterns loaded, the loom interlaces two sets of thin and durable 100% polyester threads at a right angle across the width of the machine. Unlike embroidered emblems which are produced on twill materials, the interlaced weaving process creates the entire emblem and design at the same time, in two or more colours. Without a base material layer, these emblems are much lighter in weight and have a single uniform surface, with a smooth woven texture.

Due to the properties of the very fine threads, and the fact that designs are brought together one thread at a time, it is possible to produce emblems with very intricate details, small text and gradient patterns. And, as a result of the continuous stitching process, design coverage does not impact the price of the emblems since they are always fully woven.

After the weaving process, the emblems can be finished with a choice of high-melt glue, low-melt glue, pressure sensitive glue, Velcro® or non-woven backings, allowing for heat seal, stick-on or sew-on applications. The emblems can be cut into basic or intricate shapes using die-cutting, laser cutting or hot-knife equipment, and can be trimmed with or without Merrowed borders. Woven emblems can also be produced in a double-sided format, and can be equipped with accessory features such as grommets and key-rings. The emblems are industrial and commercial launderable relative to backing type and application method.



Gradients

Metallic thread

Fine details
and small text

Double sided

Grommet and
Swivel Clasp Hook



Accessories

attachment options such as

- Grommet
- Grommet and Chain
- Grommet and Swivel Split-Ring (as pull tag)
- Grommet and Swivel Snap-Hook
- Triangle Clip with Push-Button-Snap

Custom cut shapes

FEATURES


- ☒ 100% polyester threads.
- ☒ Light weight alternative.
- ☒ Optional Merrow border.
- ☒ Heat seal, stick-on or sew-on application.
- ☒ Industrial and commercial launderable.

HEAT SEAL APPLICATION

Low-melt glue
212°F to 248°F (100°C to 120°C).

For temporary branding solutions!

Velcro® or Pressure Sensitive backing options.
(Emblems with Velcro® backing must have a merrow border.)

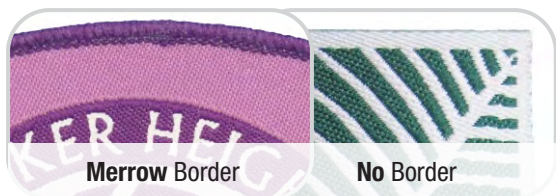

For complete product details, please visit
www.emblemtex.com/tekspec.

Be identified. Be recognized!

Emblemtex is pleased to offer you service in English or French, Canada's official languages. **This literature is available in French.**
Emblemtex est fière de vous offrir un service en anglais ou en français, langues officielles du Canada. Cette documentation est disponible en français.

The details contained within this document are offered for informational purposes only. Emblemtex declines all responsibility and liability for any errors or omissions that there may be with respect to this information. These details are subject to change without notice. All logo designs herein are registered by their respective companies. It is the responsibility of the purchaser to be aware of Emblemtex's policies in full.

800-267-9385

www.emblemtex.com

info@emblemtex.com



Emblemtex® and TekSpec® are registered trademarks of Emblemtex Solutions Group Inc.

Copyright © 2023 Emblemtex Solutions Group Inc.

rev. 2023-07

